


1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISOR	DATE	APPROVED	
REV.	A/0					0		JUNMA	05.11.2017	David	



SPECIFICATIONS	
Part's Number	2CCH16-6
Frequency(GHz)	140~180
Direction	CW
Insertion Loss(dB)MAX	0.6
Insertion Loss Ripple	
Isolation(dB)MIN	15
Return Loss(dB)MIN	13.98
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	1000/1000/10000
Operating Temperature(°C)	+20~+40
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	1000
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

DORADO Millimeter Wave				
MATERIAL:		DWG NO:		
		2CCH16-6		
SURFACE TREATMENT:		DWG BY:	JUNMA	05.11.2017
		CHK'D BY:		SCALE
DESCRIPTION:		APPV'D BY:		1:3
HIGH POWER CIRCULATOR		Unit:	Tolerance:	The First:
		mm[inch]	Liner: ±0.25	
			Anguar: ±0.5°	A4

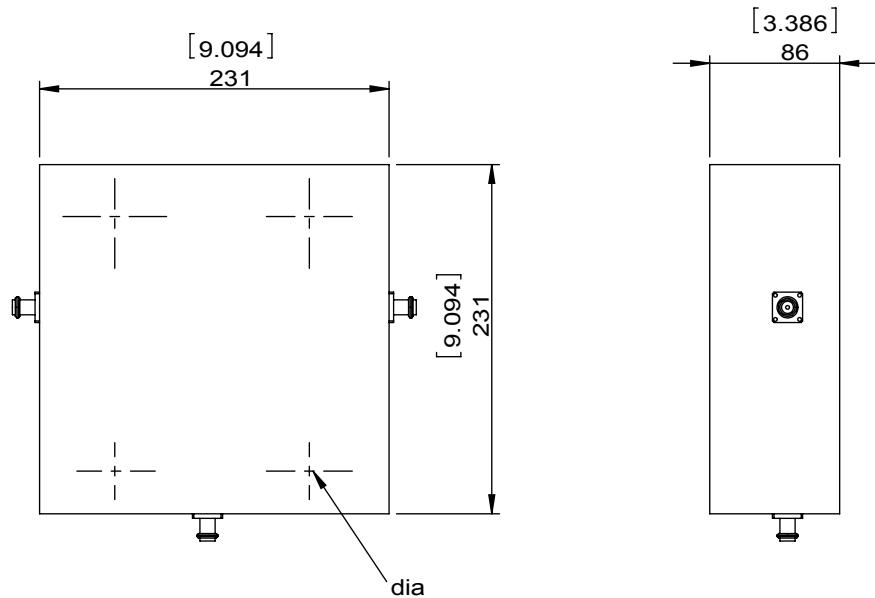

This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.