


1		2		3		4		5		6		
Document No. QR4-700-T-003								REV.	DESCRIPTION	REVISOR	DATE	APPROVED
REV. A/0								0		JUNMA	04.05.2017	David



SPECIFICATIONS	
Part's Number	2CCM12-1
Frequency(GHz)	108~136
Direction	CW
Insertion Loss(dB) TYP/MAX	0.5/0.5
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	18/17
Return Loss(dB) TYP/MIN	17.69/16.54
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	300/300/300
Operating Temperature(°C)	25/-10~+50
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	300
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

DORADO Millimeter Wave				
MATERIAL:		DWG NO:		
		2CCM12-1		
SURFACE TREATMENT:		DWG BY:	JUNMA	04.05.2017
		CHK'D BY:		SCALE
DESCRIPTION:		APPV'D BY:		1:2
BROADBAND CIRCULATOR		Unit:	Tolerance:	The First:
		mm[inch]	Liner: ±0.25	
			Anguar: ±0.5°	A4

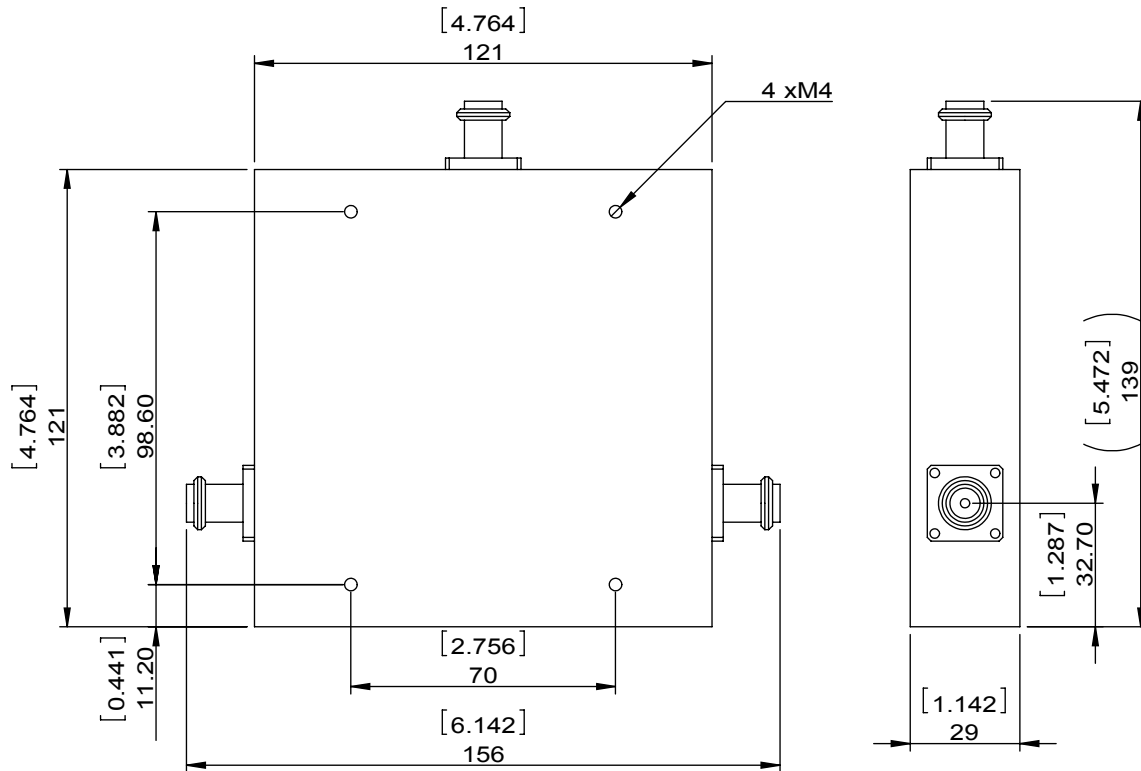

This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.