


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		JUNMA	04.05.2017	David					

SPECIFICATIONS	
Part's Number	3CCM30-1
Frequency(GHz)	2000~4000
Direction	CW
Insertion Loss(dB) TYP/MAX	0.4/0.6
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	18/15
Return Loss(dB) TYP/MIN	17.69/14.72
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	250/250/250
Operating Temperature(°C)	25/-60~+70
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	250
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

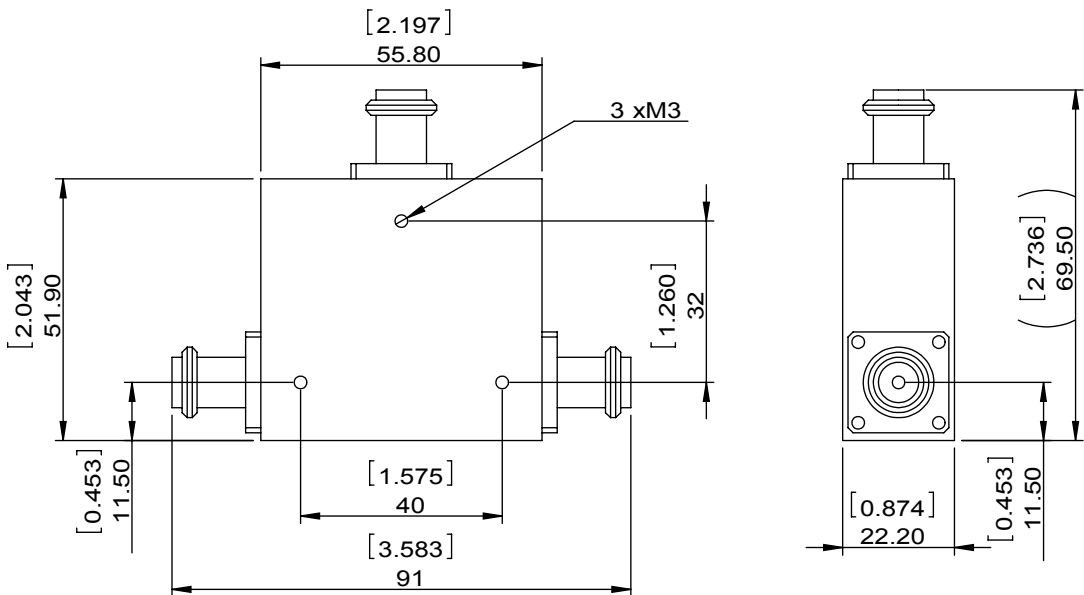

DORADO INTERNATIONAL DORADO Millimeter Wave

MATERIAL: _____ **DWG NO:** 3CCM30-1

SURFACE TREATMENT: _____

DWG BY:	JUNMA	04.05.2017	SCALE
CHK'D BY:			
APPV'D BY:			1:1.5

DESCRIPTION: BROADBAND CIRCULATOR

Unit:	Tolerance:	The First:
mm[inch]	Liner: ±0.25	
	Anguar: ±0.5°	A4



This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.