


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		LH.Mao	02.24.2017	David					

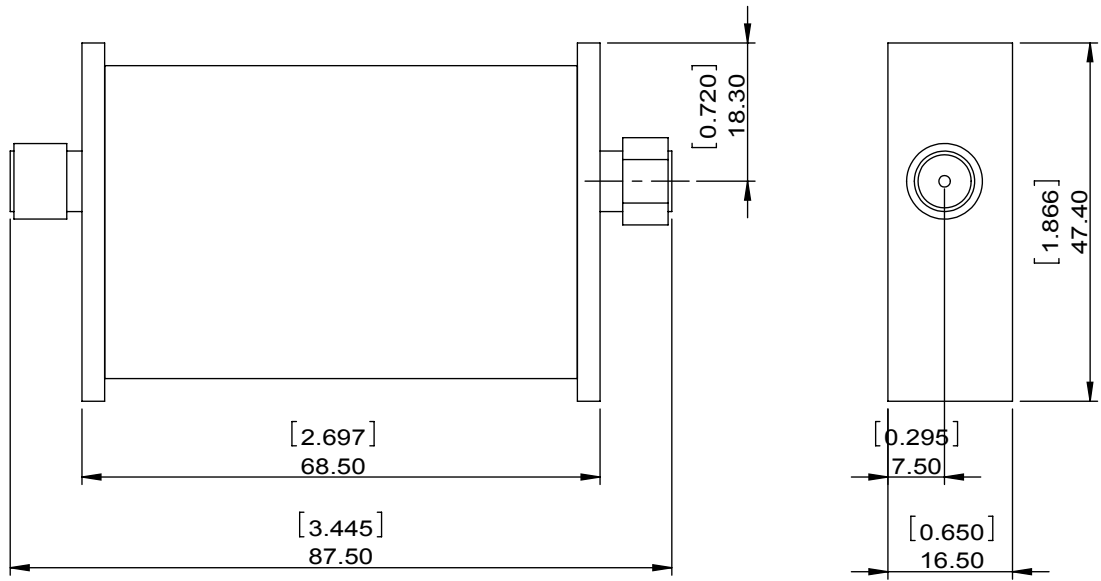

SPECIFICATIONS	
Part's Number	3ICP24-1
Frequency(GHz)	0.8~3.0
Direction	CW
Insertion Loss(dB) TYP/MAX	3.0/4.5
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	14/12
Return Loss(dB) TYP/MIN	12.74/11.73
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	1/-/-
Operating Temperature(°C)	-10~+60
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

**DORADO INTERNATIONAL** **DORADO Millimeter Wave**

<b>MATERIAL:</b>	<b>DWG NO:</b> 3ICP24-1			
<b>SURFACE TREATMENT:</b>	DWG BY:	LH.Mao	02.24.2017	SCALE
<b>DESCRIPTION:</b> <b>BROADBAND ISOLATOR</b>	CHK'D BY:			1:1
	APP'V'D BY:			A4
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 	



This document is the property of DORADO Millimeter Corp. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Corp.