


1		2		3		4		5		6		
Document No. QR4-700-T-003								REV.	DESCRIPTION	REVISOR	DATE	APPROVED
REV. A/0								0		LH.Mao	02.24.2017	David

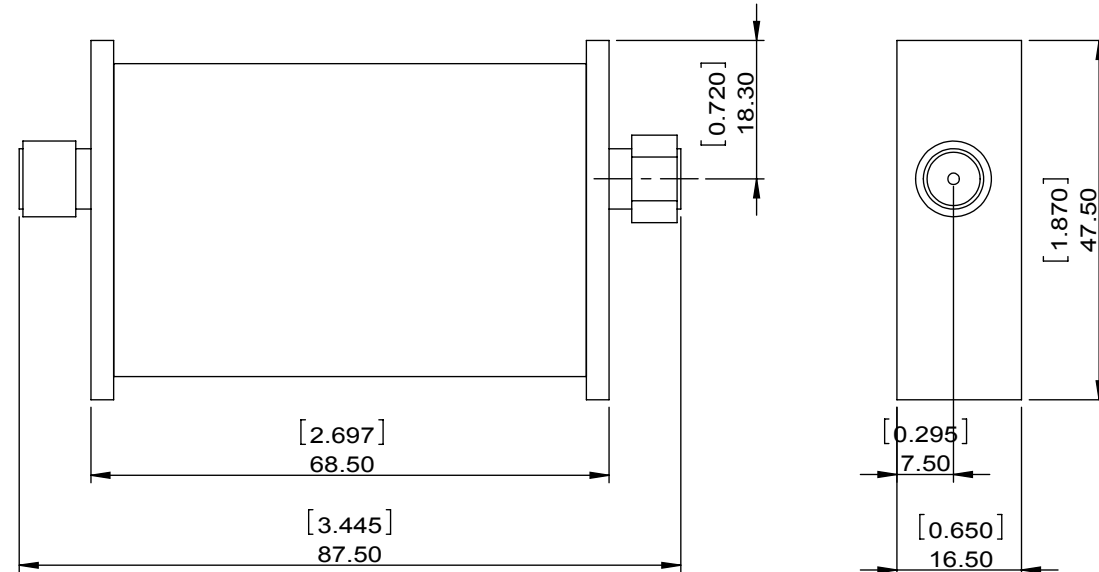

SPECIFICATIONS	
Part's Number	3ICP27-1
Frequency(GHz)	1.0~4.3
Direction	CW
Insertion Loss(dB) TYP/MAX	2.0/2.2
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	20/15
Return Loss(dB) TYP/MIN	13.98/12.74
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	1/-/-
Operating Temperature(°C)	-10~+60
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

**DORADO Millimeter Wave**

<b>MATERIAL:</b>	<b>DWG NO:</b>			
	3ICP27-1			
<b>SURFACE TREATMENT:</b>	DWG BY:	LH.Mao	02.24.2017	SCALE
	CHK'D BY:			
<b>DESCRIPTION:</b> <b>BROADBAND ISOLATOR</b>	APP'V'D BY:			1:1
	Unit:	Tolerance:	The First:	A4
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		



This document is the property of DORADO Millimeter Corp. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Corp.