


1		2		3		4		5		6	
Document No. QR4-700-T-003								REV.		DESCRIPTION	
REV.		A/0						0		LH.Mao	
								11.02.2016		DAVE	

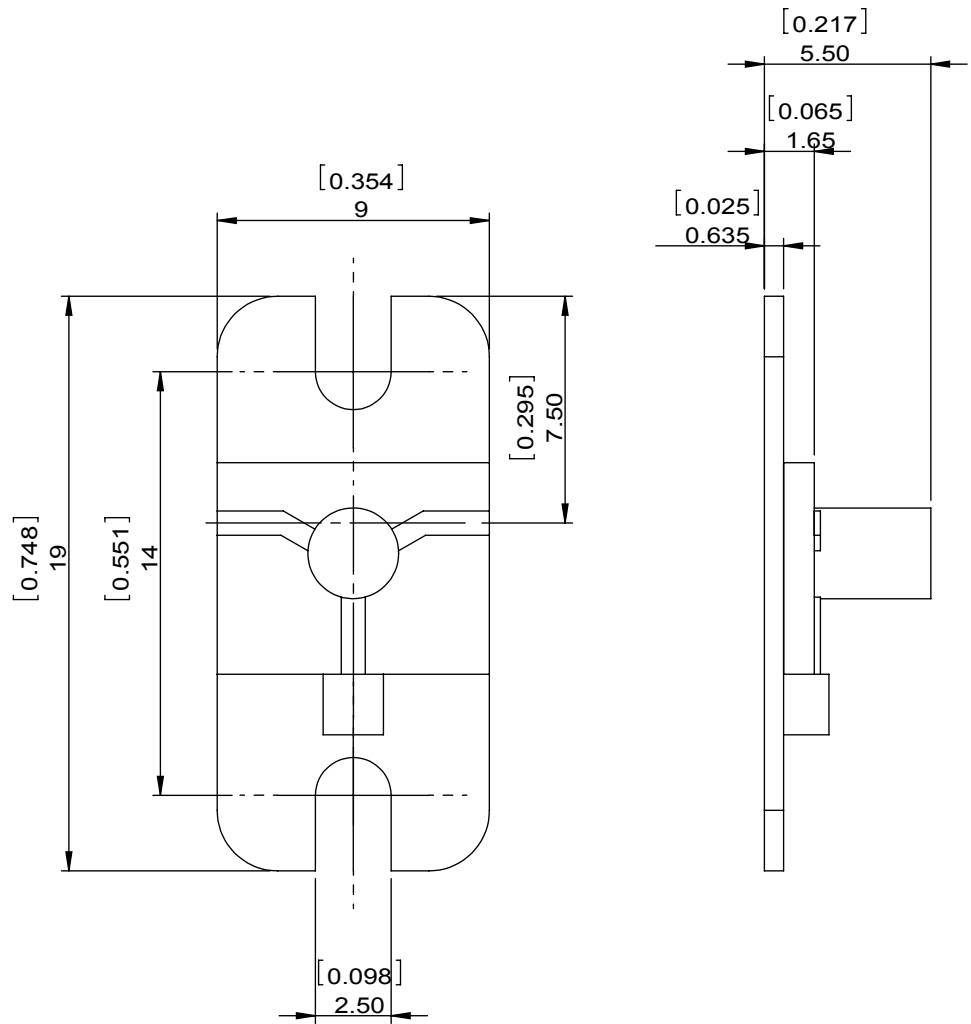

SPECIFICATIONS	
Part's Number	3IMS95-1
Frequency(GHz)	8.40-10.70
Direction	CW
Insertion Loss(dB)MAX	0.5
Insertion Loss Ripple	
Isolation(dB)MIN	18
Return Loss(dB)MIN	17.69
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	10/2/-
Operating Temperature(°C)	-30~+65
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	2
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

DORADO INTERNATIONAL **DORADO Millimeter Corp**

MATERIAL:	DWG NO: 3IMS95-1			
SURFACE TREATMENT:	DWG BY:	LH.Mao	11.02.2016	SCALE
	CHK'D BY:			
DESCRIPTION: MICROSTRIP ISOLATOR	APP'V'D BY:			4:1
	Unit:	Tolerance:	The First:	
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		



This document is the property of DORADO Millimeter Corp. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Corp.