


1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISOR	DATE	APPROVED	
REV.	A/0					0		LH.Mao	01.13.2017	David	

SPECIFICATIONS	
Part's Number	4CMG26-1
Frequency(GHz)	25.0-27.0
Direction	CW
Insertion Loss(dB)MAX	1.1
Insertion Loss Ripple	
Isolation(dB)MIN	18
Return Loss(dB)MIN	17.69
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	1/1-
Operating Temperature(°C)	-30~+70
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	1
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

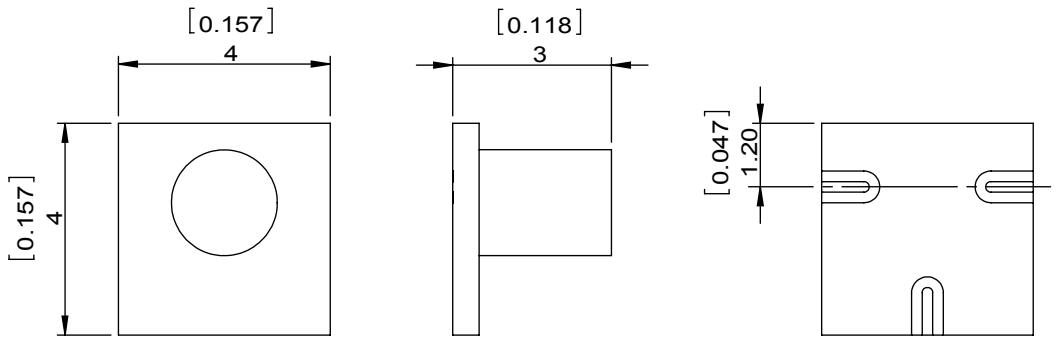

**DORADO** DORADO Millimeter Corp  
INTERNATIONAL

<b>MATERIAL:</b>	<b>DWG NO:</b> 4CMG26-1			
<b>SURFACE TREATMENT:</b>	DWG BY:	LH.Mao	01.13.2017	SCALE
	CHK'D BY:			
<b>DESCRIPTION:</b> MICROSTRIP CIRCULATOR	APP'V'D BY:			6:1
	Unit:	Tolerance:	The First:	A4
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		



This document is the property of DORADO Millimeter Corp. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Corp.