


1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISOR	DATE	APPROVED	
REV.	A/0					0		LH.Mao	01.13.2017	David	

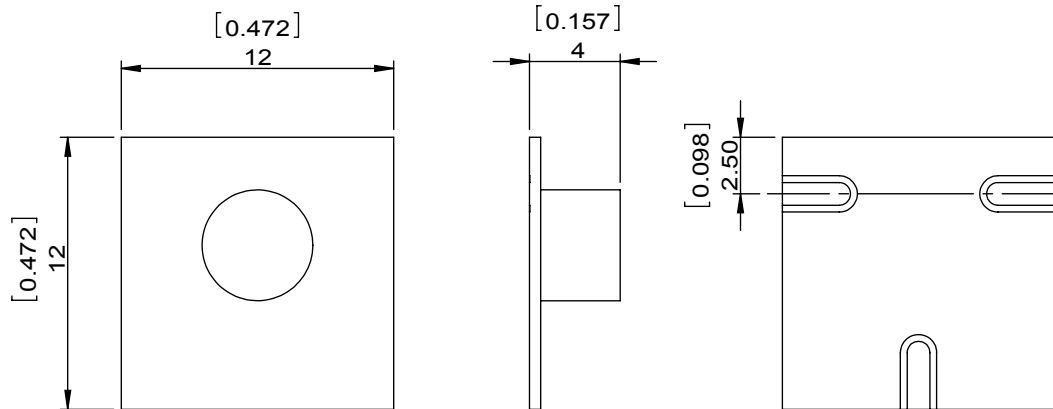

SPECIFICATIONS	
Part's Number	4CMG(xx)-2
Frequency(GHz)	8.5 – 10.5
Direction	CW
Insertion Loss(dB)MAX	0.6
Insertion Loss Ripple	
Isolation(dB)MIN	20
Return Loss(dB)MIN	19.08
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	1/1/-
Operating Temperature(°C)	-30~+70
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	1
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

DORADO DORADO Millimeter Corp
INTERNATIONAL

MATERIAL:

DWG NO:
4CMG(xx)-2

SURFACE TREATMENT:

DWG BY:	LH.Mao	01.13.2017	SCALE
CHK'D BY:			
APPV'D BY:			3:1
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4

DESCRIPTION:
MICROSTRIP CIRCULATOR



This document is the property of DORADO Millimeter Corp. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Corp.