


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				JUNMA	04.11.2017	David			

SPECIFICATIONS	
Part's Number	4ICP10-4
Frequency(GHz)	5.0~14.0
Direction	CW
Insertion Loss(dB) TYP/MAX	2.0/2.0
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	20/20
Return Loss(dB) TYP/MIN	11.12/10.88
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	1/-/-
Operating Temperature(°C)	25/-10 to +60
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

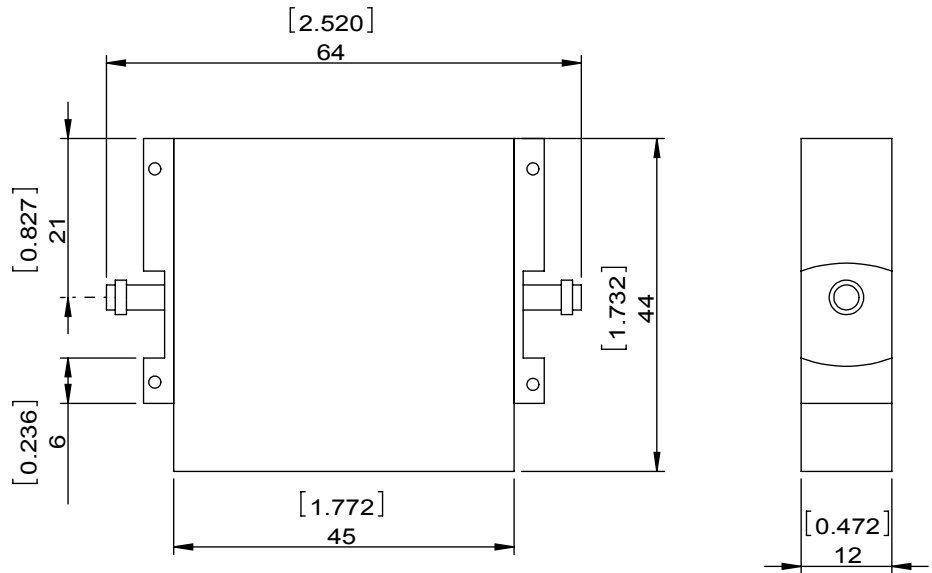

**DORADO INTERNATIONAL** **DORADO Millimeter Wave**

<b>MATERIAL:</b>	<b>DWG NO:</b> 4ICP10-4			
<b>SURFACE TREATMENT:</b>	DWG BY:	JUNMA	04.11.2017	SCALE
	CHK'D BY:			1:1
<b>DESCRIPTION:</b> <b>BROADBAND ISOLATOR</b>	APPV'D BY:			
	Unit:	Tolerance:	The First:	
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		A4



This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.