


| | | | | | | | | | | | |
|----------------------------|--|----------|--|--------|--|-------------|--|----------------|--|-----------------|--|
| 1 | | 2 | | 3 | | 4 | | 5 | | 6 | |
| Document No. QR4-700-T-003 | | REV. A/0 | | REV. 0 | | DESCRIPTION | | REVISOR LH.Mao | | DATE 11.09.2016 | |
| | | | | | | | | | | APPROVED David | |

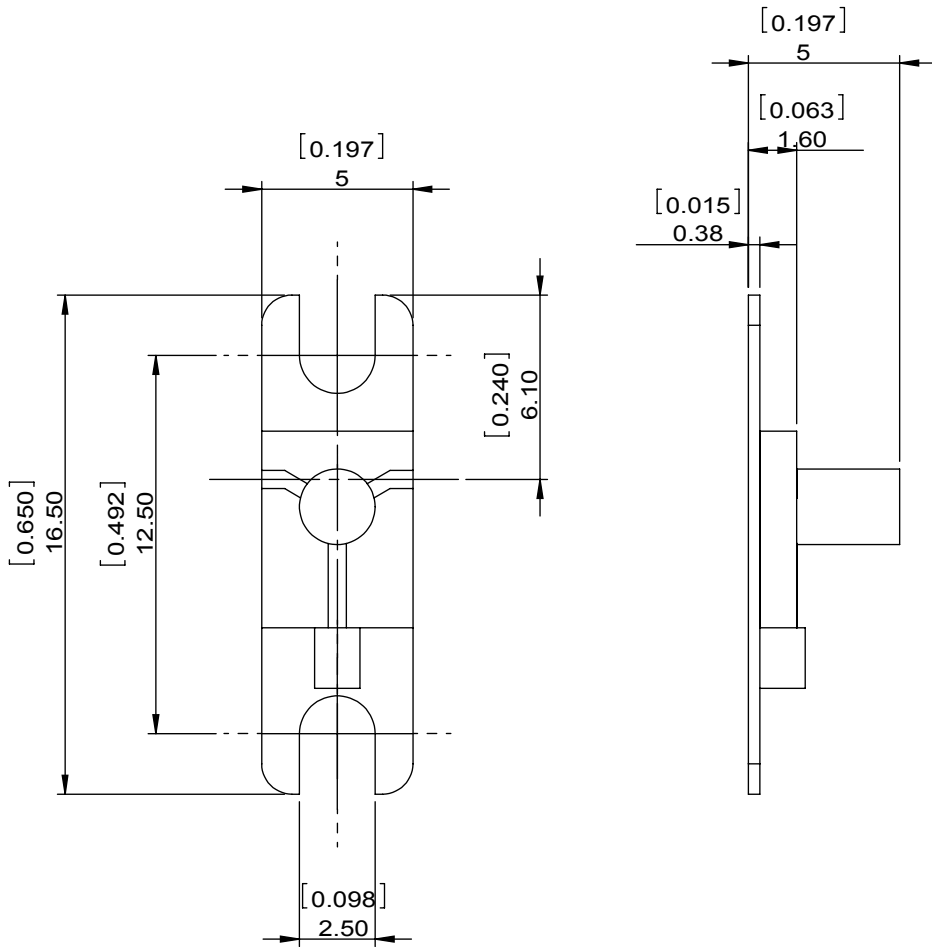

| SPECIFICATIONS | |
|---------------------------------|-------------|
| Part's Number | 4IMS26-2 |
| Frequency(GHz) | 25.20-27.20 |
| Direction | CW |
| Insertion Loss(dB)MAX | 0.9 |
| Insertion Loss Ripple | |
| Isolation(dB)MIN | 20 |
| Return Loss(dB)MIN | 16.54 |
| 3rd IMD(dBc)MAX | |
| Power FWD/REV/PK(Watt) | 2/1/- |
| Operating Temperature(°C) | -30~+70 |
| Storage Temperature(°C) | |
| 2nd/3rd Harmonic(dBc) | |
| Termination/Attenuator(Watt/dB) | 1 |
| Tab(W×LG×THK)(mm[Inch]) | |
| Additional Notes | GWB |

DORADO INTERNATIONAL **DORADO Millimeter Corp**

| | | | | |
|--|----------------------------|---------------------------------------|------------|--|
| MATERIAL: | DWG NO: 4IMS26-2 | | | |
| SURFACE TREATMENT: | DWG BY: LH.Mao | 11.09.2016 | SCALE | |
| DESCRIPTION: MICROSTRIP ISOLATOR | CHK'D BY: | | 4:1 | |
| | APP'V'D BY: | | A4 | |
| | Unit: mm[inch] | Tolerance: Liner: ±0.25 Anguar: ±0.5° | The First: | |



This document is the property of DORADO Millimeter Corp. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Corp.