


1		2		3		4		5		6	
Document No.		QR4-700-T-003		REV.		DESCRIPTION		REVISOR		DATE	
REV.		A/0		0				LH.Mao		01.14.2017	
										APPROVED	
										David	

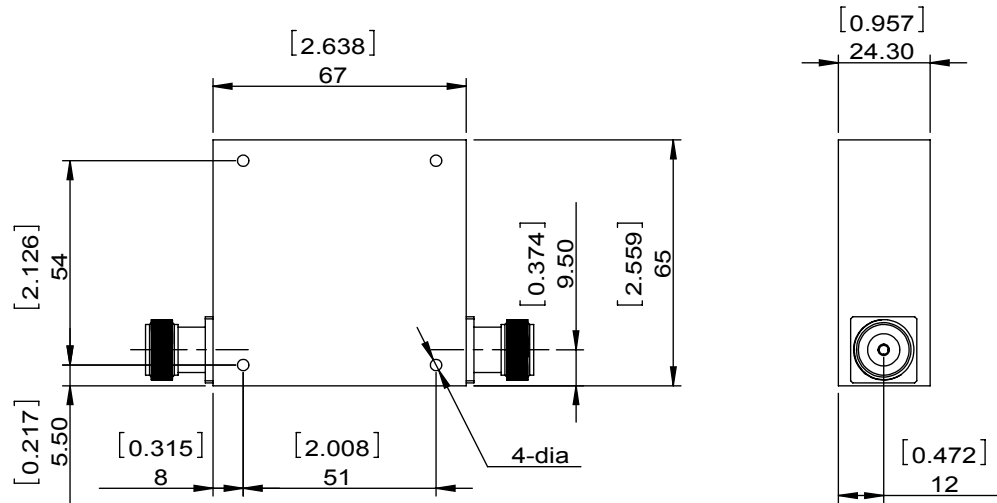

SPECIFICATIONS	
Part's Number	1ICS98-1
Frequency(GHz)	0.088-0.108
Direction	CW
Insertion Loss(dB) TYP/MAX	1.0/1.2
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	17/15
Return Loss(dB) TYP/MIN	15.56/12.74
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	30/-/-
Operating Temperature(°C)	-10~+60
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

**DORADO INTERNATIONAL** **DORADO Millimeter Wave**

<b>MATERIAL:</b>	<b>DWG NO:</b> 1ICS88-1			
<b>SURFACE TREATMENT:</b>	DWG BY:	LH.Mao	01.14.2017	SCALE
	CHK'D BY:			
<b>DESCRIPTION:</b> <b>BROADBAND ISOLATOR</b>	APP'V'D BY:			1:2
	Unit:	Tolerance:	The First:	A4
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		



This document is the property of DORADO Millimeter Corp. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Corp.