


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				LH.Mao	03.13.2017	David			



SPECIFICATIONS	
Part's Number	2CCB75-1
Frequency(GHz)	0.5~1.0
Direction	CW
Insertion Loss(dB) TYP/MAX	0.5/0.8
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	17/14
Return Loss(dB) TYP/MIN	16.54/15.56
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	10/10/-
Operating Temperature(°C)	25/0~+40
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	10
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

<b>DORADO Millimeter Wave</b>				
<b>MATERIAL:</b>		<b>DWG NO:</b>		
		2CCB75-1		
<b>SURFACE TREATMENT:</b>		DWG BY:	LH.Mao	03.13.2017
		CHK'D BY:		SCALE
<b>DESCRIPTION:</b>		APPV'D BY:		1:2.5
<b>BROADBAND CIRCULATOR</b>		Unit:	Tolerance:	The First:
		mm[inch]	Liner: ±0.25	
			Anguar: ±0.5°	A4

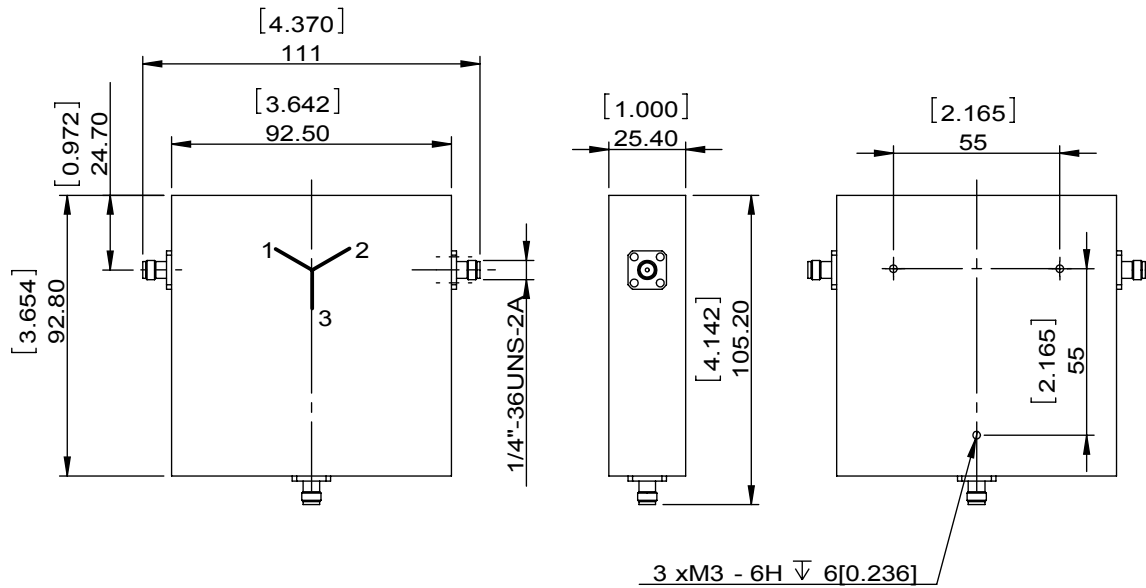

This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.