


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				JUNMA	05.11.2017	David			

SPECIFICATIONS	
Part's Number	2CCH17-3
Frequency(GHz)	0.17~0.18
Direction	CW
Insertion Loss(dB)MAX	0.3
Insertion Loss Ripple	
Isolation(dB)MIN	23
Return Loss(dB)MIN	23.13
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	5500/5500/5500
Operating Temperature(°C)	+5~+45
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	5500
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB



		DORADO Millimeter Wave			
MATERIAL:		DWG NO: 2CCH17-3			
SURFACE TREATMENT:		DWG BY:	JUNMA	05.11.2017	SCALE
DESCRIPTION: HIGH POWER CIRCULATOR		CHK'D BY:			1:3
		APPV'D BY:			
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4

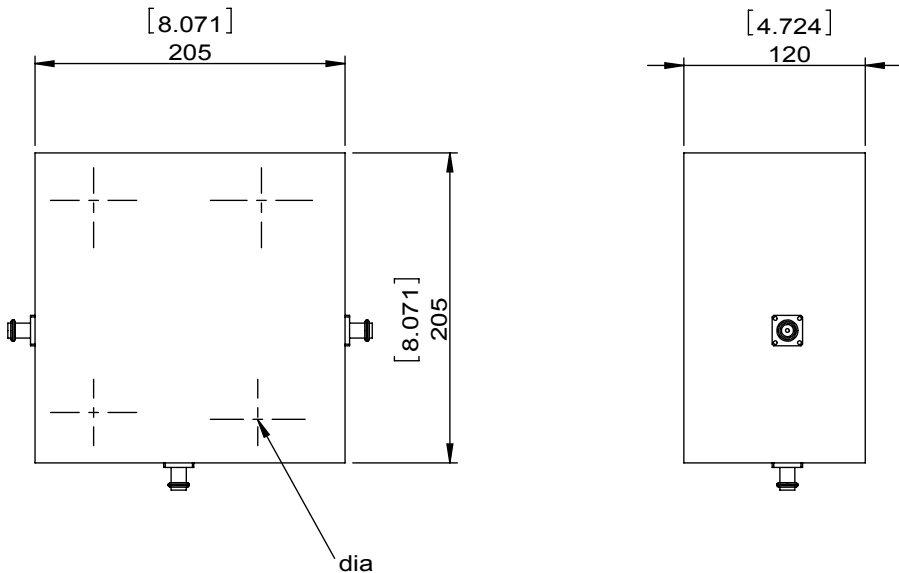

This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.