


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				JUNMA	04.05.2017	David			

SPECIFICATIONS	
Part's Number	2CCM20-1
Frequency(GHz)	0.17~0.23
Direction	CW
Insertion Loss(dB) TYP/MAX	0.5/0.8
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	18/16
Return Loss(dB) TYP/MIN	17.69/15.56
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	200/200/1000
Operating Temperature(°C)	25/-50~+50
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	200
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

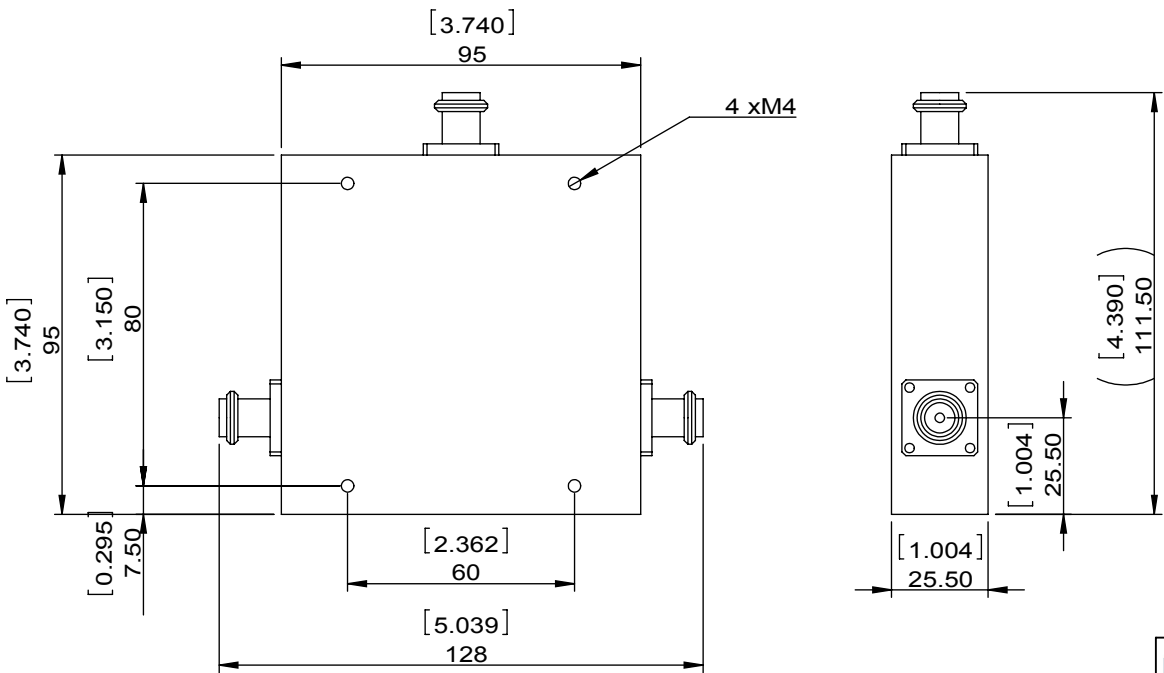

This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.

		DORADO Millimeter Wave			
MATERIAL:		DWG NO: 2CCM20-1			
SURFACE TREATMENT:		DWG BY:	JUNMA	04.05.2017	SCALE
DESCRIPTION: BROADBAND CIRCULATOR		CHK'D BY:			1:2
		APPV'D BY:			
		Unit:	Tolerance:	The First:	
		mm[inch]	Liner: ±0.25		A4
			Anguar: ±0.5°		