Document No.	QR4-700-T-003
REV.	A/0

REV.	DESCRIPTION	REVISOR	DATE	APPROVED
0		JUNMA	04.05.2017	David

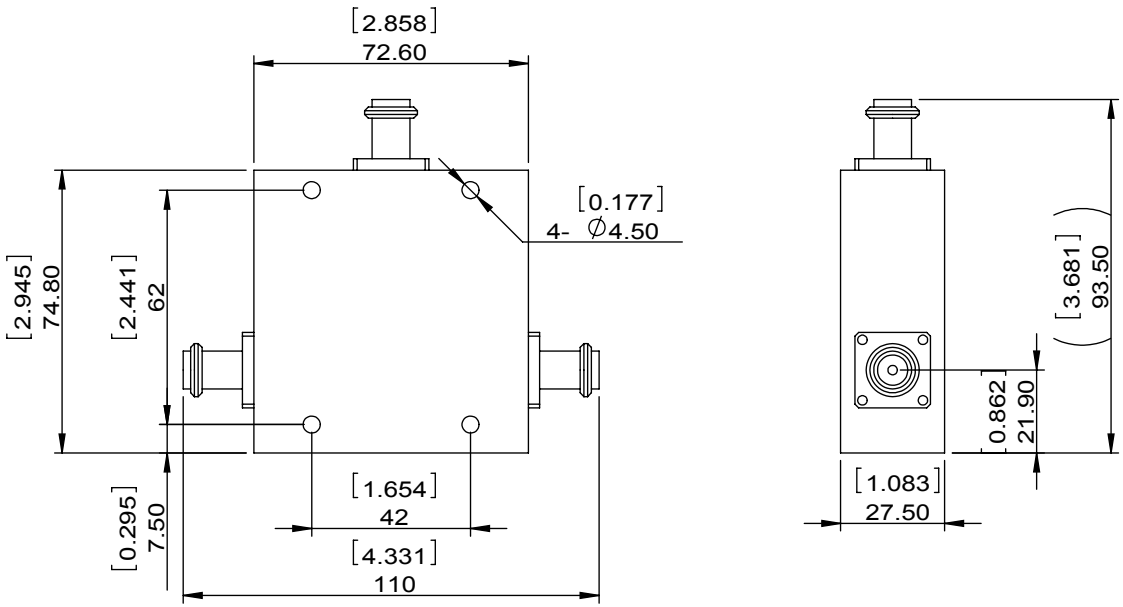

SPECIFICATIONS	
Part's Number	2CCM70-2
Frequency(GHz)	0.65~0.76
Direction	CW
Insertion Loss(dB) TYP/MAX	0.2/0.3
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	23/20
Return Loss(dB) TYP/MIN	23.13/19.08
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	600/600/1000
Operating Temperature(°C)	25/-10~+50
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	600
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

DORADO INTERNATIONAL

DORADO Millimeter Wave

MATERIAL:

DWG NO: 2CCM70-2

SURFACE TREATMENT:

DWG BY:	JUNMA	04.05.2017	SCALE
CHK'D BY:			1:2
APPV'D BY:			
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4

DESCRIPTION: BROADBAND CIRCULATOR

RoHS COMPLIANCE

This document is the property of DORADO Millimeter Wave.
It cannot be copied, duplicated, used for manufacturing purposes
or communicated to third party as a whole or partly,
without the written consent of DORADO Millimeter Wave.

WEIGHT:

SHEET 1 OF 1