


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				JUNMA	04.05.2017	David			



SPECIFICATIONS	
Part's Number	2CCM81-2
Frequency(GHz)	0.75~0.86
Direction	CW
Insertion Loss(dB) TYP/MAX	0.2/0.3
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	23/20
Return Loss(dB) TYP/MIN	23.13/19.08
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	600/600/1000
Operating Temperature(°C)	25/-10~+50
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	600
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

<b>DORADO Millimeter Wave</b>													
<b>MATERIAL:</b>	<b>DWG NO:</b> 2CCM81-2												
<b>SURFACE TREATMENT:</b>	<table border="1"> <tr> <td>DWG BY:</td> <td>JUNMA</td> <td>04.05.2017</td> <td>SCALE</td> </tr> <tr> <td>CHK'D BY:</td> <td></td> <td></td> <td></td> </tr> <tr> <td>APPV'D BY:</td> <td></td> <td></td> <td>1:2</td> </tr> </table>	DWG BY:	JUNMA	04.05.2017	SCALE	CHK'D BY:				APPV'D BY:			1:2
DWG BY:	JUNMA	04.05.2017	SCALE										
CHK'D BY:													
APPV'D BY:			1:2										
<b>DESCRIPTION:</b> <b>BROADBAND CIRCULATOR</b>	<table border="1"> <tr> <td>Unit: mm[inch]</td> <td>Tolerance: Liner: ±0.25 Anguar: ±0.5°</td> <td>The First: </td> <td>A4</td> </tr> </table>	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 	A4								
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 	A4										

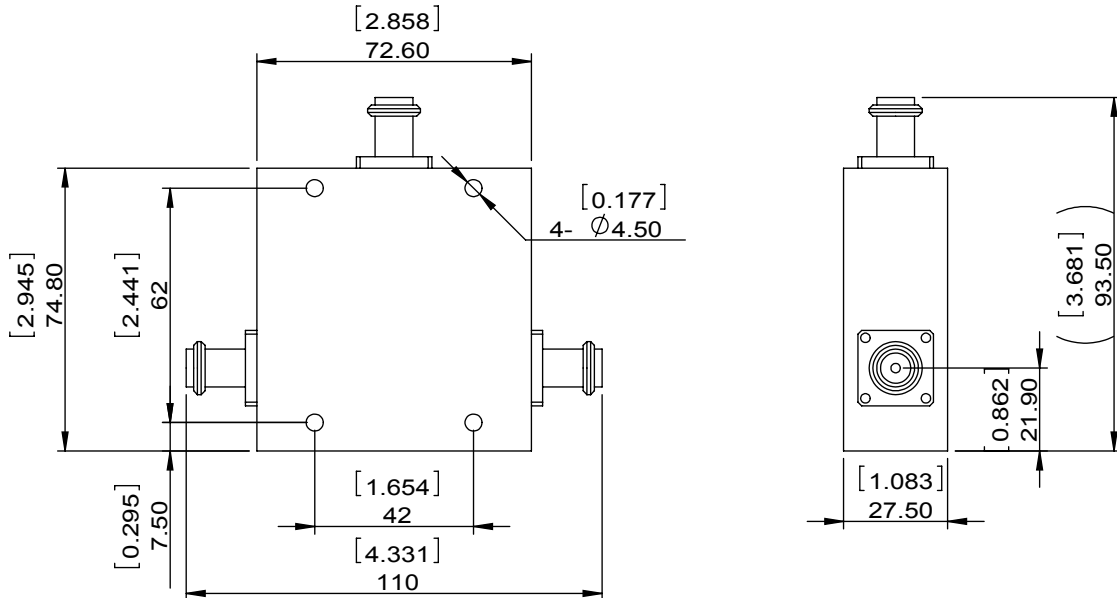

This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.