


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		LH.Mao	03.14.2017	David			

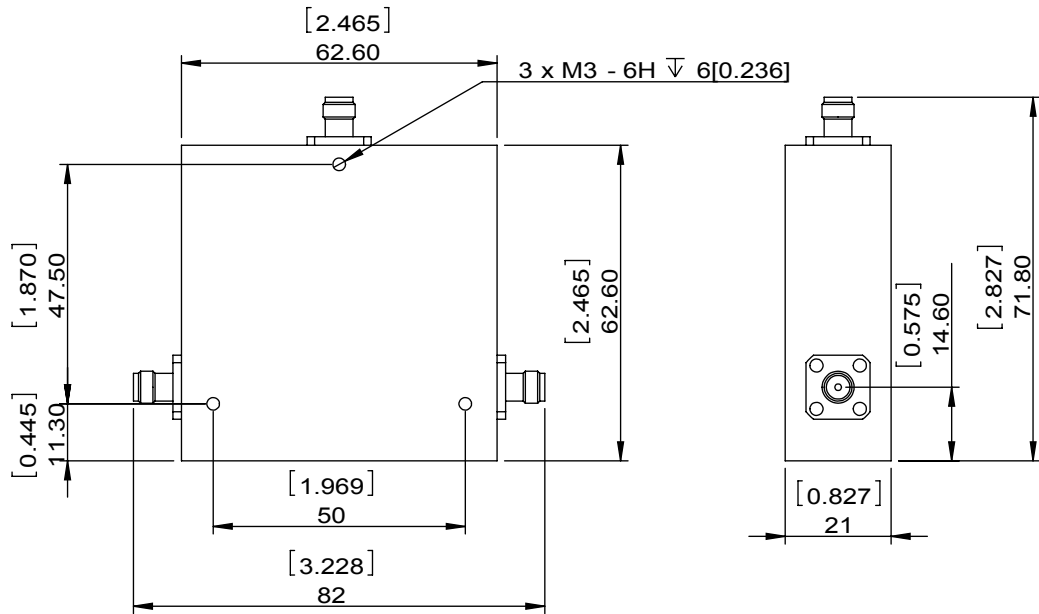

SPECIFICATIONS	
Part's Number	3CCB14-6
Frequency(GHz)	0.8~2.0
Direction	CW
Insertion Loss(dB) TYP/MAX	0.7/0.9
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	13/12.5
Return Loss(dB) TYP/MIN	12.74/11.73
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	75/75/-
Operating Temperature(°C)	25/+10~+40
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	75
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

DORADO INTERNATIONAL DORADO Millimeter Wave

MATERIAL:	DWG NO: 3CCB14-6			
	SURFACE TREATMENT:	DWG BY:	LH.Mao	03.14.2017
DESCRIPTION: BROADBAND CIRCULATOR	CHK'D BY:			SCALE
	APPV'D BY:			1:1.5
	Unit:	Tolerance:	The First:	A4
mm[inch]	Liner: ±0.25			
	Anguar: ±0.5°			



This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.