


1		2		3		4		5		6	
Document No. QR4-700-T-003								REV. DESCRIPTION REVISOR DATE APPROVED			
REV. A/0								0		LH.Mao 03.13.2017 David	



SPECIFICATIONS	
Part's Number	3CCB15-1
Frequency(GHz)	1.0~2.0
Direction	CW
Insertion Loss(dB) TYP/MAX	0.4/1.0
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	20/15
Return Loss(dB) TYP/MIN	19.08/13.98
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	75/75/-
Operating Temperature(°C)	25/+1~+70
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	75
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

DORADO Millimeter Wave				
MATERIAL:		DWG NO: 3CCB15-1		
SURFACE TREATMENT:		DWG BY: LH.Mao	03.13.2017	SCALE
DESCRIPTION: BROADBAND CIRCULATOR		CHK'D BY:		1:2
		APPV'D BY:		A4
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:

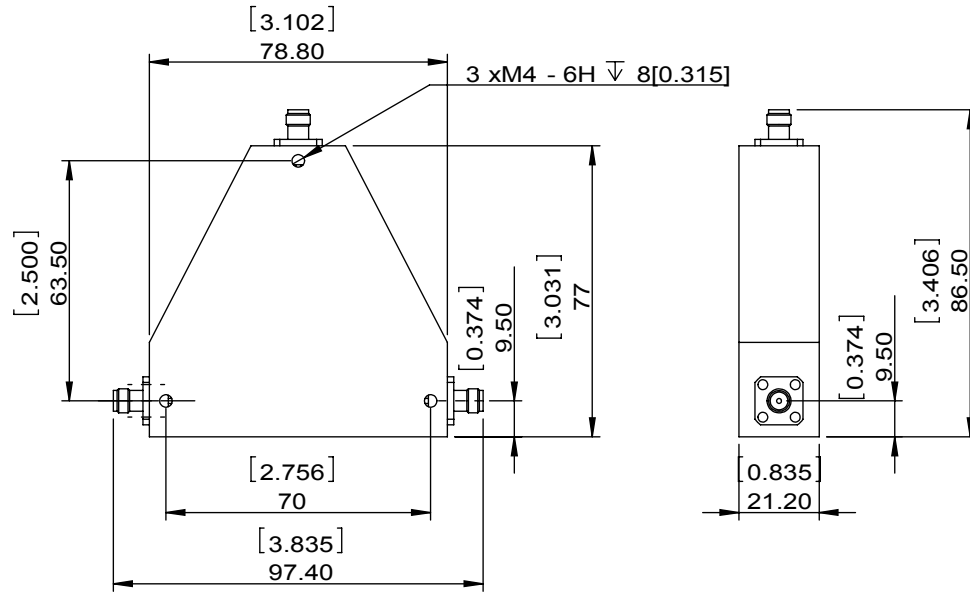

This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.