



1		2		3		4		5		6	
Document No.		QR4-700-T-003		REV.		REV.		DESCRIPTION		APPROVED	
REV.		A/0		0		X.S		09.09.2021		HC.Qiu	
				1		J.Z		08.24.2022		HC.Qiu	

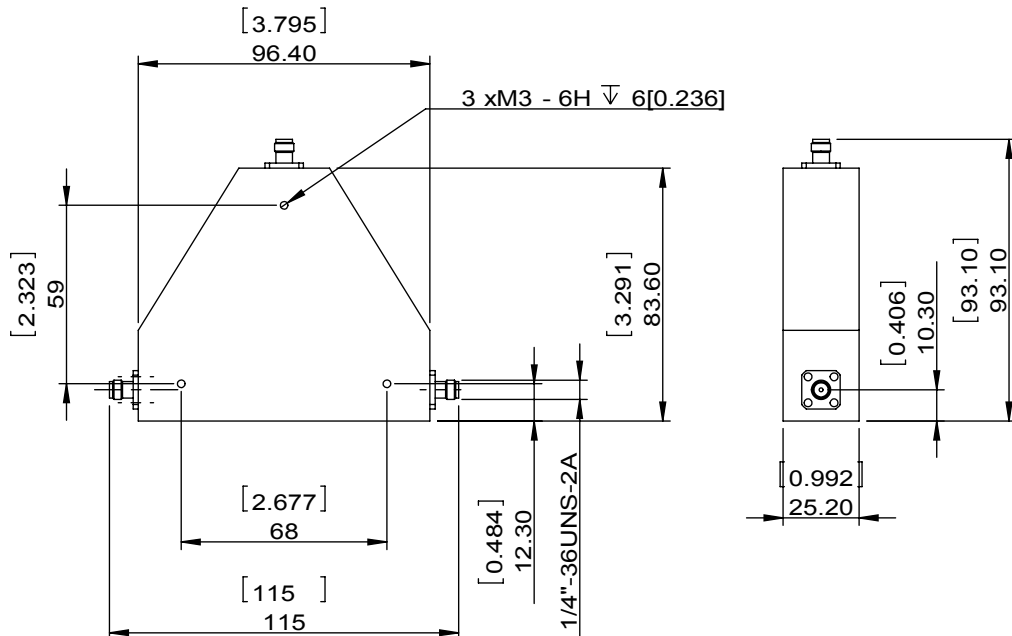

SPECIFICATIONS	
Part's Number	3CCB20-4
Frequency(GHz)	1.000~3.000
Direction	CW
Insertion Loss(dB) TYP/MAX	1.1/1.3
Insertion Loss Ripple	-
Isolation(dB) TYP/MIN	14.0/12.0
Return Loss(dB) TYP/MIN	13.98/12.01
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	50/50/-
Operating Temperature(°C)	25/+1~+70
Storage Temperature(°C)	-40~+60
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	50.0
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	GWB,Weight: 410g

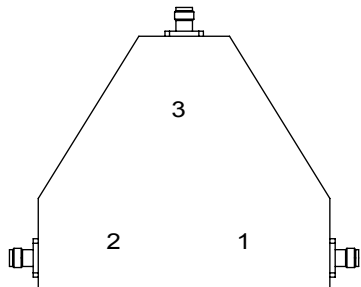

This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.

DORADO Millimeter Wave	
MATERIAL:	DWG NO:
-	3CCB20-4
SURFACE TREATMENT:	
-	
DESCRIPTION:	
BROADBAND CIRCULATOR	
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°
	The First:
	1:2
	A4