


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				LH.Mao	03.13.2017	David			



SPECIFICATIONS	
Part's Number	3CCB21-1
Frequency(GHz)	1.40~2.70
Direction	CW
Insertion Loss(dB) TYP/MAX	0.5/0.7
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	19/18
Return Loss(dB) TYP/MIN	19.08/17.69
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	50/50/-
Operating Temperature(°C)	25/0~+65
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	50
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

DORADO Millimeter Wave				
MATERIAL:		DWG NO: 3CCB21-1		
SURFACE TREATMENT:		DWG BY:	LH.Mao	03.13.2017
DESCRIPTION: BROADBAND CIRCULATOR		CHK'D BY:		SCALE
		APPV'D BY:		1:1.5
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

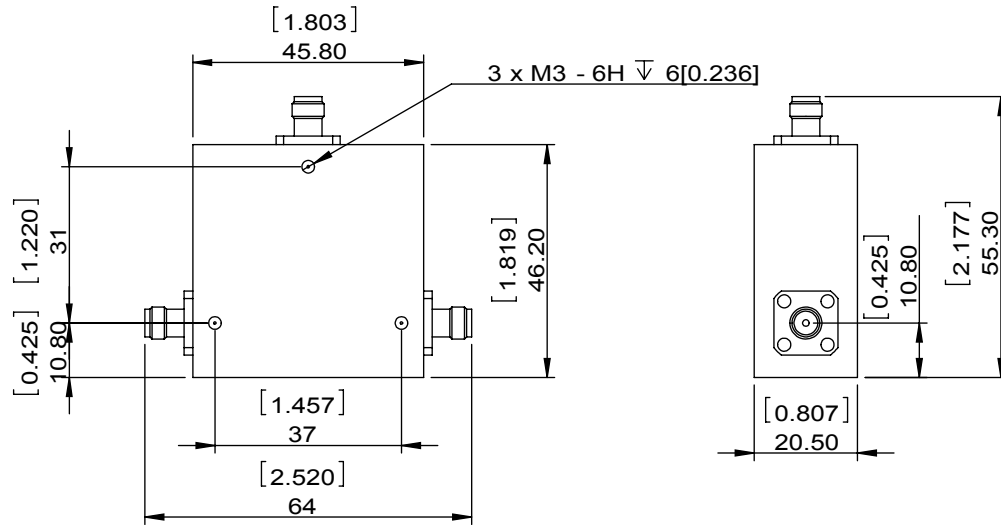

This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.