


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		LH.Mao	03.13.2017	David					

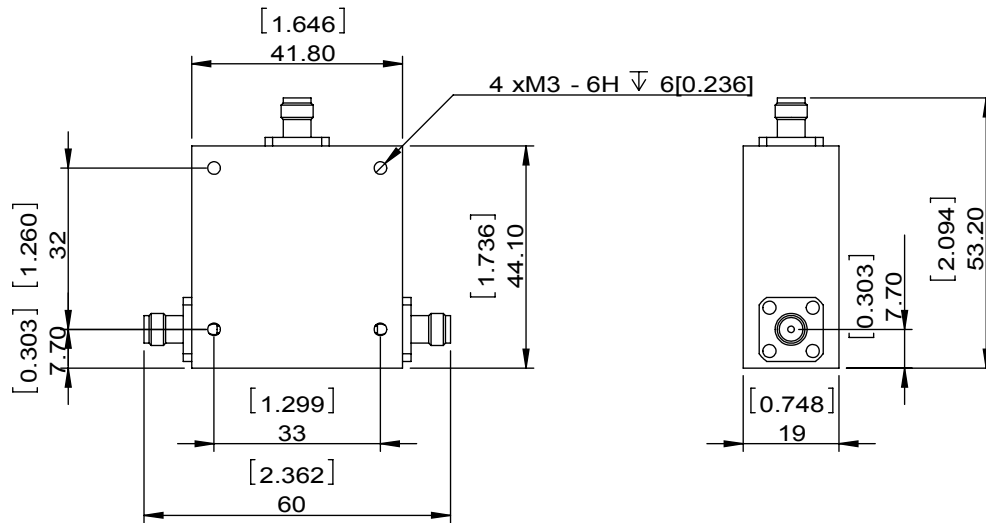

SPECIFICATIONS	
Part's Number	3CCB30-1
Frequency(GHz)	2.0~4.0
Direction	CW
Insertion Loss(dB) TYP/MAX	0.4/0.6
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	20/16
Return Loss(dB) TYP/MIN	19.08/15.56
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	50/50/-
Operating Temperature(°C)	25/-25~+85
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	50
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

**DORADO INTERNATIONAL** **DORADO Millimeter Wave**

<b>MATERIAL:</b>	<b>DWG NO:</b> 3CCB30-1			
<b>SURFACE TREATMENT:</b>	DWG BY:	LH.Mao	03.13.2017	SCALE
	CHK'D BY:			1 : 1.5
<b>DESCRIPTION:</b> <b>BROADBAND CIRCULATOR</b>	APP'V'D BY:			
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4



This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.