


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				LH.Mao	03.14.2017	David			

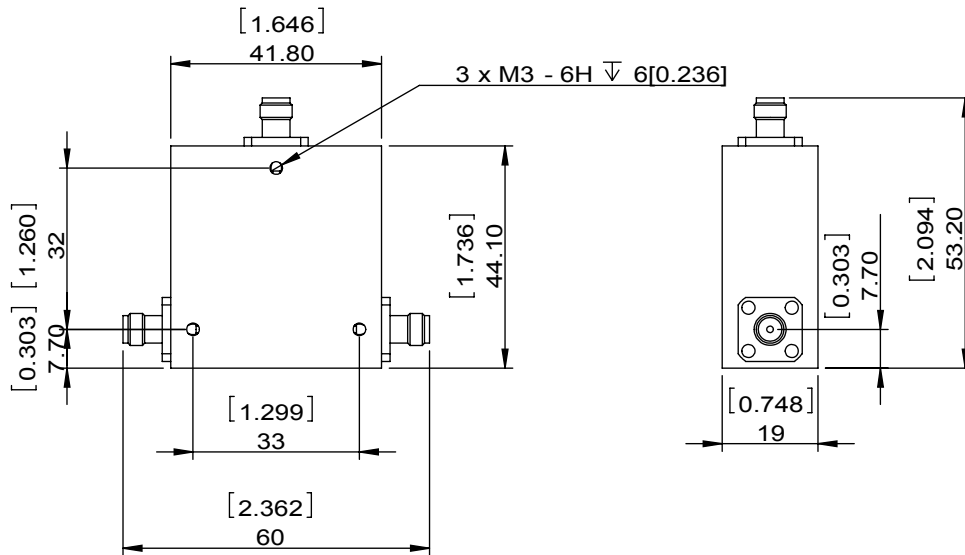

SPECIFICATIONS	
Part's Number	3CCB40-1
Frequency(GHz)	2.0~6.0
Direction	CW
Insertion Loss(dB) TYP/MAX	0.8/1.2
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	14/13
Return Loss(dB) TYP/MIN	13.98/12.74
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	35/35/-
Operating Temperature(°C)	25/-40~+85
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	35
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

**DORADO INTERNATIONAL DORADO Millimeter Wave**

<b>MATERIAL:</b>	<b>DWG NO:</b> 3CCB40-1			
<b>SURFACE TREATMENT:</b>	DWG BY:	LH.Mao	03.14.2017	SCALE
	CHK'D BY:			
<b>DESCRIPTION:</b> BROADBAND CIRCULATOR	APP'V'D BY:			1:1.5
	Unit:	Tolerance:	The First:	A4
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		



This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.