


1		2		3		4		5		6	
Document No. QR4-700-T-003						REV. 0		DESCRIPTION		REVISOR LH.Mao	
REV. A/0										DATE 03.23.2017	
										APPROVED David	



SPECIFICATIONS	
Part's Number	3CCC60-2-MS
Frequency(GHz)	17/15
Direction	CW
Insertion Loss(dB)MAX	0.5/0.6
Insertion Loss Ripple	
Isolation(dB)MIN	17/15
Return Loss(dB)MIN	16.54/13.98
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	1/1/-
Operating Temperature(°C)	-196/+15 ~ +35
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	1
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

<b>DORADO Millimeter Wave</b>				
<b>MATERIAL:</b>		<b>DWG NO:</b>		
		3CCC60-2-MS		
<b>SURFACE TREATMENT:</b>		DWG BY: LH.Mao		SCALE
		CHK'D BY:		1 : 2
<b>DESCRIPTION:</b>		APP'V'D BY:		
Cryogenic Circulator		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

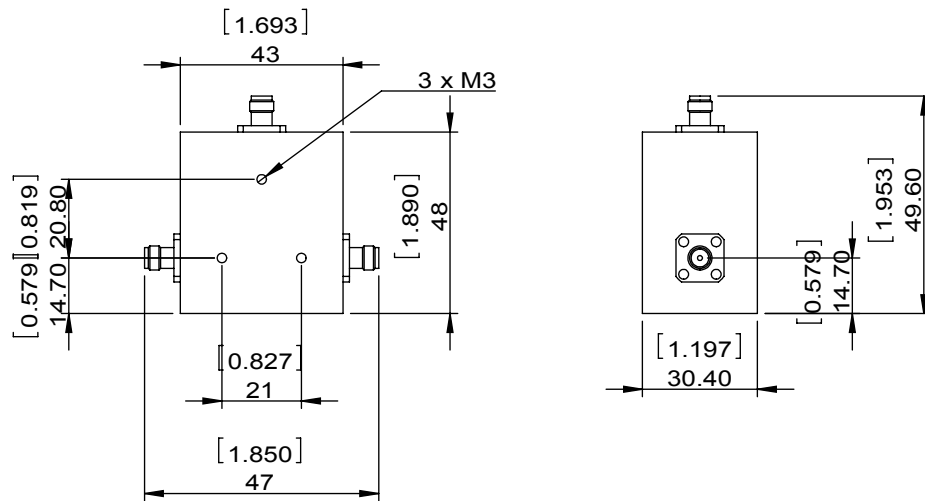

This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.