


1		2		3		4		5		6	
Document No. QR4-700-T-003		REV. A/0		REV. 0		DESCRIPTION		REVISOR JUNMA		DATE 04.05.2017	
REV. A/0										APPROVED David	

SPECIFICATIONS	
Part's Number	3CCM30-1
Frequency(GHz)	2.00~4.00
Direction	CW
Insertion Loss(dB) TYP/MAX	0.4/0.6
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	18/15
Return Loss(dB) TYP/MIN	17.69/14.72
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	250/250/250
Operating Temperature(°C)	25/-60~+70
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	250
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

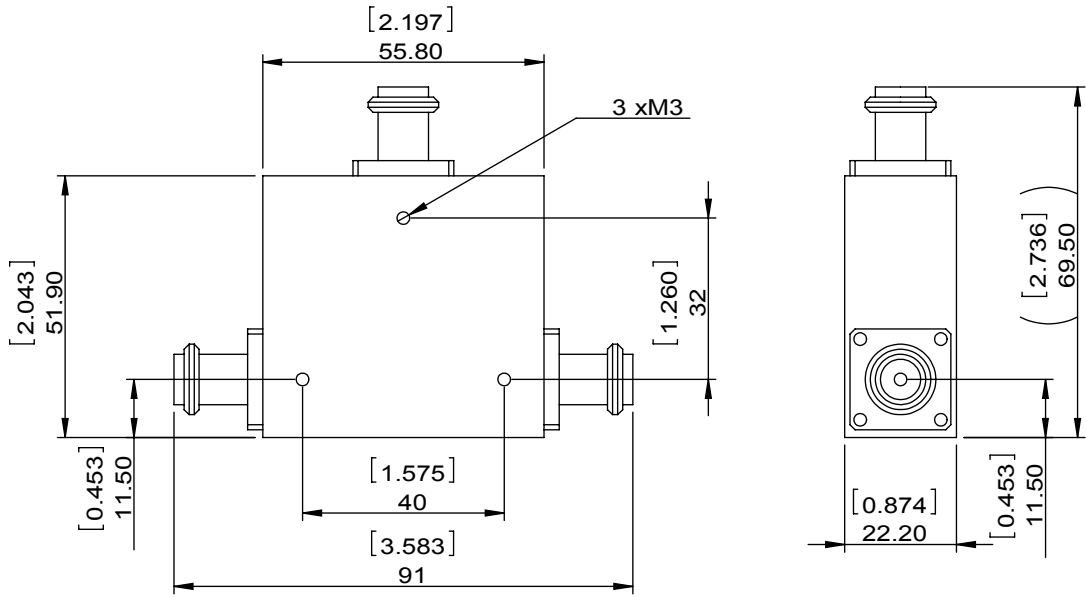

DORADO INTERNATIONAL DORADO Millimeter Wave

MATERIAL:	DWG NO: 3CCM30-1			
SURFACE TREATMENT:	DWG BY:	JUNMA	04.05.2017	SCALE
	CHK'D BY:			
DESCRIPTION: BROADBAND CIRCULATOR	APPV'D BY:			1:1.5
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	
				A4



This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.