


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				LH.Mao	03.14.2017	David			

SPECIFICATIONS

Part's Number	4CCB12-2
Frequency(GHz)	6.0~18.0
Direction	CW
Insertion Loss(dB)MAX	1.0/1.2
Insertion Loss Ripple	
Isolation(dB)MIN	13/13
Return Loss(dB)MIN	12.74/12.74
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	1/1/-
Operating Temperature(°C)	25/-60~+85
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	1
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

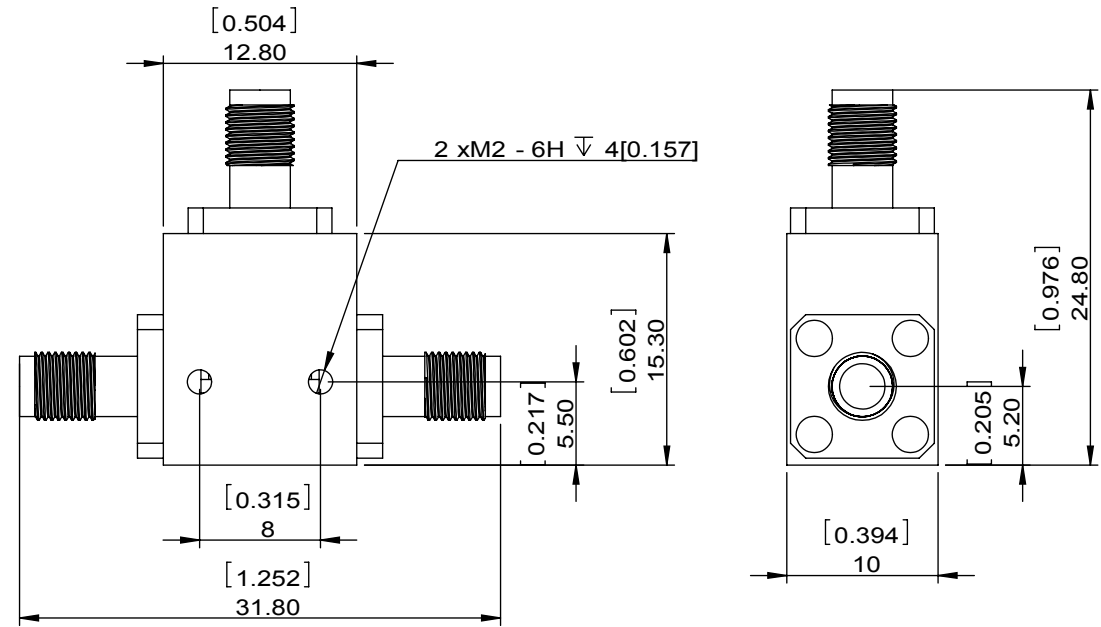

This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.

DORADO INTERNATIONAL **DORADO Millimeter Wave**

MATERIAL:	DWG NO: 4CCB12-2			
SURFACE TREATMENT:	DWG BY:	LH.Mao	03.14.2017	SCALE
DESCRIPTION: BROADBAND CIRCULATOR	CHK'D BY:			2:1
	APPV'D BY:			
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4