


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	Hu.Jiang	DATE	07.26.2018	APPROVED	HC.Qiu



SPECIFICATIONS	
Part's Number	WA22-OS2.4
Frequency(GHz)	33.0~50.0
Direction	
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	
Return Loss(dB)MAX	16.5
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	
Operating Temperature(°C)	
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	
OS2.4 Connector ,WR22	

DORADO Millimeter Wave	
MATERIAL: Brass	DWG NO: WA22-OS2.4
SURFACE TREATMENT: Gold plated, inner	DWG BY: Hu.Jiang 07.26.2018 SCALE
DESCRIPTION: Waveguide Coaxial Adapter	CHK'D BY: APPV'D BY: 1:1
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5° The First:
A4	

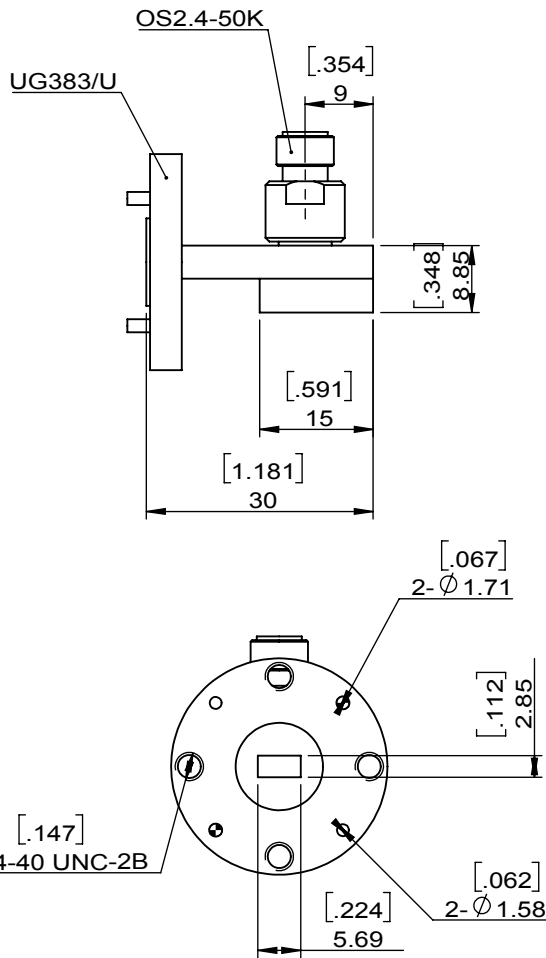

This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.