


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	Hu.Jiang	DATE	11.14.2018	APPROVED	HC.Qiu

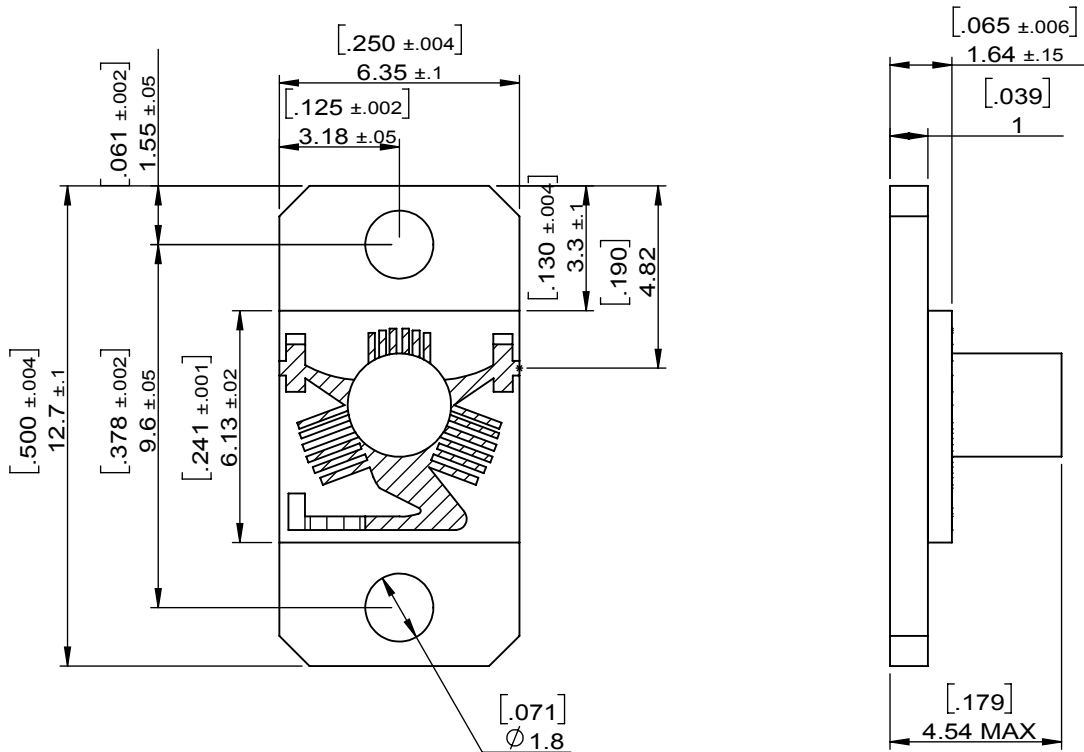

SPECIFICATIONS	
Part's Number	2IMC-8.9-3-8.9BW11.24
Frequency(GHz)	8.400~9.400
Direction	CW
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	19.1
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	1/0.6/-
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-54~+120
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

NOTES:

- 1.Clockwise direction
- 2.Mounting:do not heat above 130°C.
- 3.ROHS compliant
- 4.Load and Tuning conductor(97In3Ag) optional location and configuration determined by vendor.
- 5.Humidity 5 to 95% non-condensing.
- 6.Max temperature during welding process:+350°C @ 25msec.



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc				
MATERIAL:		DWG NO:		
-		2IMC-8.9-3-8.9BW11.24		
SURFACE TREATMENT:		DWG BY:	Hu.Jiang	11.14.2018
-		CHK'D BY:		SCALE
DESCRIPTION:		APPV'D BY:		5:1
ISOLATOR,MICROSTRIP		Unit:	Tolerance:	The First:
		mm[inch]	Liner: ±0.25	
			Anguar: ±0.5°	A4