


1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISOR	DATE	APPROVED	
REV.	A/0					0		LH.Mao	01.14.2017	David	

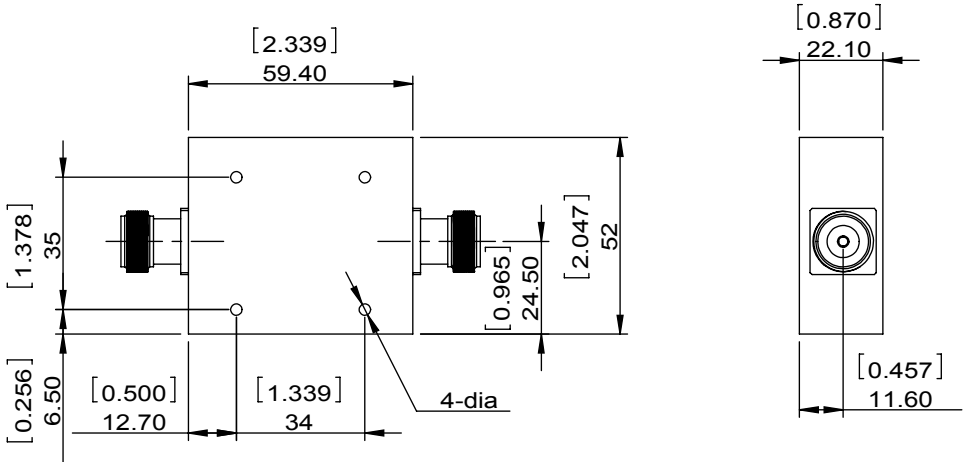

SPECIFICATIONS	
Part's Number	2ICS35-1
Frequency(GHz)	0.270~0.405
Direction	CW
Insertion Loss(dB) TYP/MAX	0.8/1.0
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	17/15
Return Loss(dB) TYP/MIN	13.98/12.74
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	30/-/-
Operating Temperature(°C)	30/-/-
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

DORADO INTERNATIONAL **DORADO Millimeter Wave**

MATERIAL:	DWG NO: 2ICS35-1			
	SURFACE TREATMENT:			
DESCRIPTION: BROADBAND ISOLATOR	DWG BY:	LH.Mao	01.14.2017	SCALE
	CHK'D BY:			1:2
	APP'V'D BY:			
Unit:	Tolerance:	The First:		A4
mm[inch]	Liner: ±0.25 Anguar: ±0.5°			



This document is the property of DORADO Millimeter Corp. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Corp.