


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				JUNMA	05.11.2017	David			



SPECIFICATIONS	
Part's Number	2CCH60-3
Frequency(GHz)	0.47~0.79
Direction	CW
Insertion Loss(dB)MAX	0.3
Insertion Loss Ripple	
Isolation(dB)MIN	20
Return Loss(dB)MIN	20.83
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	15000/15000/30000
Operating Temperature(°C)	+5~+45
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	15000
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

DORADO Millimeter Wave	
MATERIAL:	DWG NO: 2CCH60-3
SURFACE TREATMENT:	DWG BY: JUNMA CHK'D BY: APPV'D BY:
DESCRIPTION: HIGH POWER CIRCULATOR	05.11.2017 SCALE: 1:3
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°
	The First:
	A4

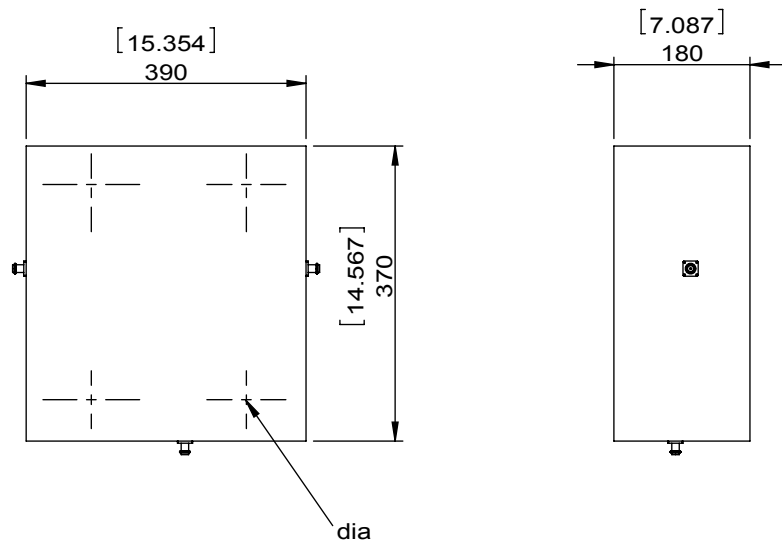

This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.