


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	LH.Mao	DATE	02.10.2017	APPROVED	David

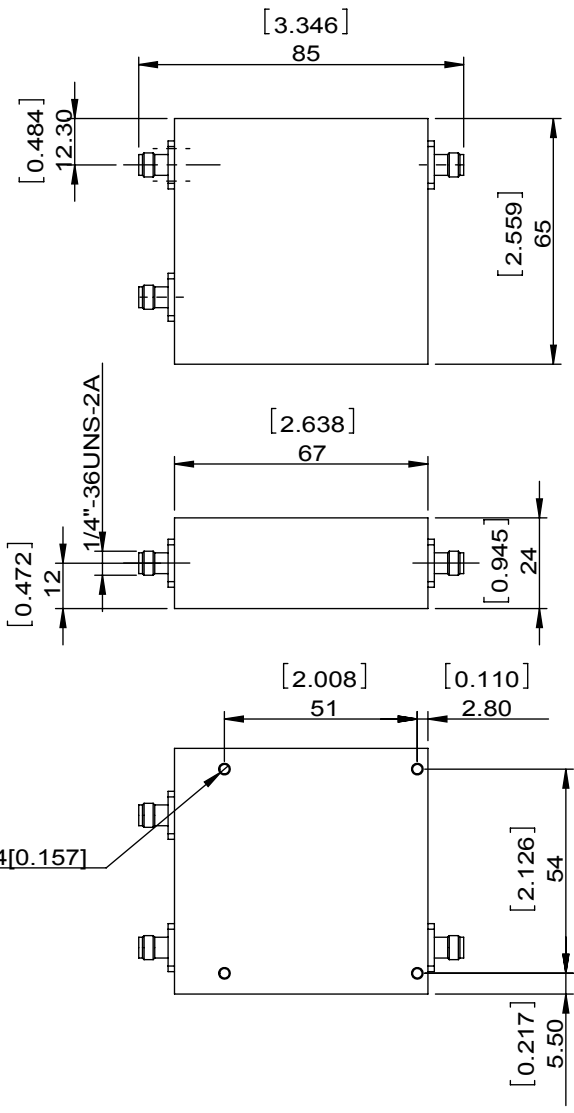

SPECIFICATIONS	
Part's Number	2CCS14-1
Frequency(GHz)	0.108~0.176
Direction	CW
Insertion Loss(dB) TYP/MAX	1.2/1.5
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	15/14
Return Loss(dB) TYP/ MIN	13.98/12.21
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	30/-/-
Operating Temperature(°C)	-10~+60
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

DORADO DORADO Millimeter Wave
INTERNATIONAL

MATERIAL:	DWG NO: 2CCS14-1			
SURFACE TREATMENT:	DWG BY:	LH.Mao	02.10.2017	SCALE
	CHK'D BY:			
DESCRIPTION: BROADBAND CIRCULATOR	APP'V'D BY:			1:2
	Unit:	Tolerance:	The First:	A4
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		



This document is the property of DORADO Millimeter Corp. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Corp.