


1		2		3		4		5		6		
Document No. QR4-700-T-003								REV.	DESCRIPTION	REVISOR	DATE	APPROVED
REV. A/0								0		LH.Mao	02.24.2017	David



SPECIFICATIONS	
Part's Number	3ICP40-2
Frequency(GHz)	2.0~6.2
Direction	CW
Insertion Loss(dB) TYP/MAX	1.3/1.7
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	20/18
Return Loss(dB) TYP/MIN	13.98/12.74
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	1/-1
Operating Temperature(°C)	-40~+80
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

DORADO Millimeter Wave				
MATERIAL:		DWG NO: 3ICP40-2		
SURFACE TREATMENT:		DWG BY: LH.Mao	02.24.2017	SCALE
DESCRIPTION: BROADBAND ISOLATOR		CHK'D BY:		1:1
		APPV'D BY:		A4
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	
		The First:		

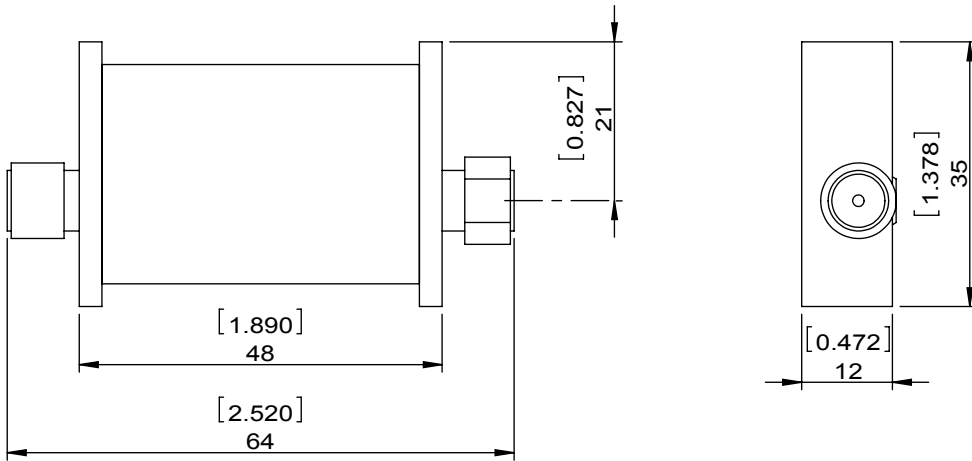

This document is the property of DORADO Millimeter Corp. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Corp.