


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				LH.Mao	03.22.2017	David			

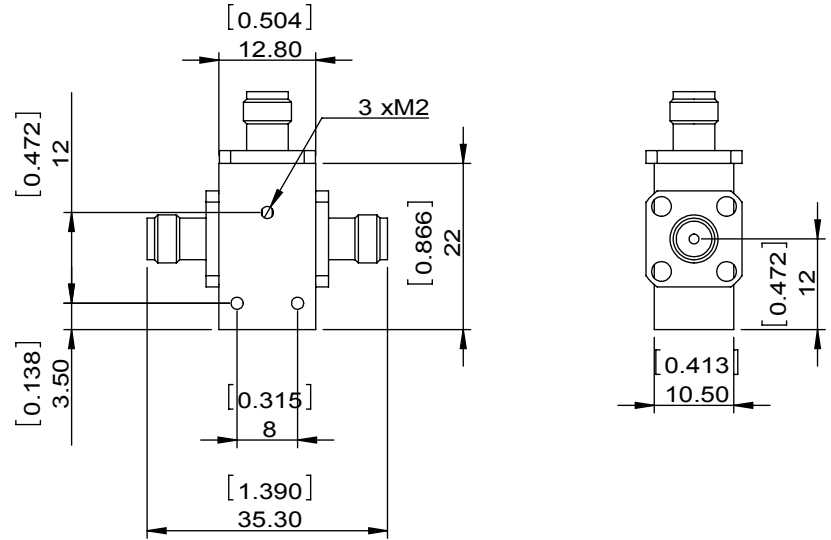

SPECIFICATIONS	
Part's Number	4ICC26-1
Frequency(GHz)	25.0~27.0
Direction	CW
Insertion Loss(dB) TYP/MAX	0.9/1.0
Insertion Loss Ripple	
Isolation(dB) TYP/MIN	20/17
Return Loss(dB) TYP/MIN	16.54/15.56
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	1/-/-
Operating Temperature(°C)	-196/+15 to +35
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

DORADO INTERNATIONAL **DORADO Millimeter Wave**

MATERIAL:	DWG NO: 4ICC26-1			
SURFACE TREATMENT:	DWG BY:	LH.Mao	03.22.2017	SCALE
	CHK'D BY:			
DESCRIPTION: Cryogenic Isolator	APPV'D BY:			2 : 1
	Unit:	Tolerance:	The First:	A4
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		



This document is the property of DORADO Millimeter Wave. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of DORADO Millimeter Wave.